

Description

This extensometer is used to measure displacement of length of structure or incline.


Feature

- High precision and stability
- Easy installation by small size and light weight
- Easy connection with automatic measuring equipment



Specification

Type	PDP-□ □ □		
Rated Capacity	500mm	1000mm	2000mm
Rated Output	Approx. 5mV/V		
Non-linearity	1% RO		
Safe Temperature Range	-10 ~ 80°C		
Resistance	350Ω		
Excitation Voltage	Less than 2V		
Safe Exciting Voltage	5V		
Electrical Connection	4Core Shield		

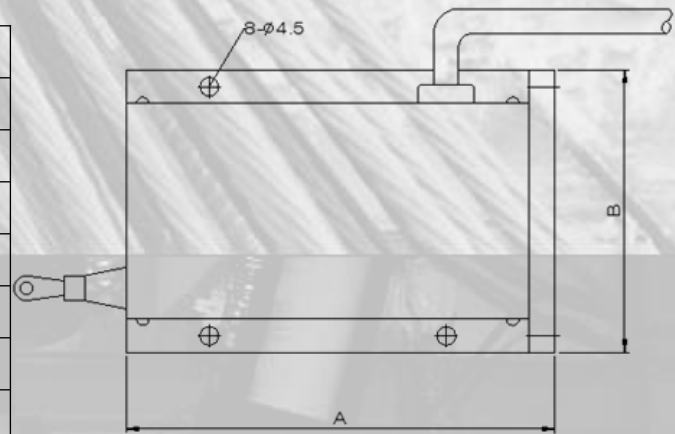

Dimension

Type	A	B	C
PDP-500	88	68	76
PDP-1000	88	68	76
PDP-2000	103	68	100

